
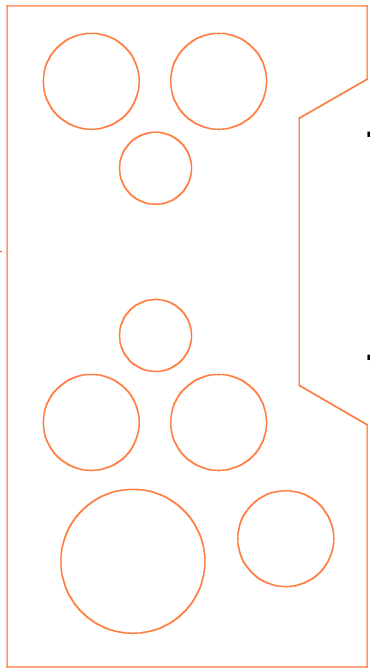


Holey driver brace needs to be 35-40% holes and the cut-out for the magnet such that the driver is braced firmly against it but without stressing driver.

3 slots per side, 9.5mm wide x 42mm tall. Note that the slot spacers reach all the way to the back of the cabinet

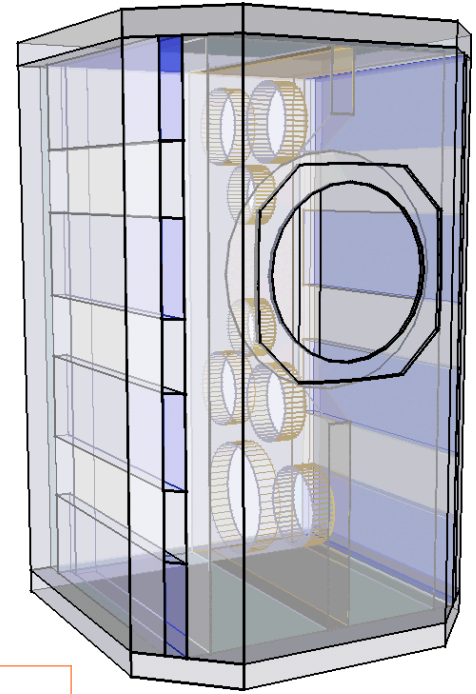

FX120/F120A dFonkenFX ov8
 © 2009 planet_10 enterprises limited
 02-july-2009 designed & drawn by dld
 free for non-commercial use only

- Notes:
- 0/ designed for Fostex FX120/F120A
 - 1/ target volume 10 liters = $xxin^3$
 - 2/ All panels 15mm thick baffle is 2x12mm (shown) or 1x18mm, or 1x15 no rebate, and a layer overlaid to simulate rebate
 - 3/ cut chamfers after the box has been built