


FR125S Bipole miniOnken vo.91

© 2005-7 planet_10 enterprises limited
01 - november -2005
designed & drawn by did

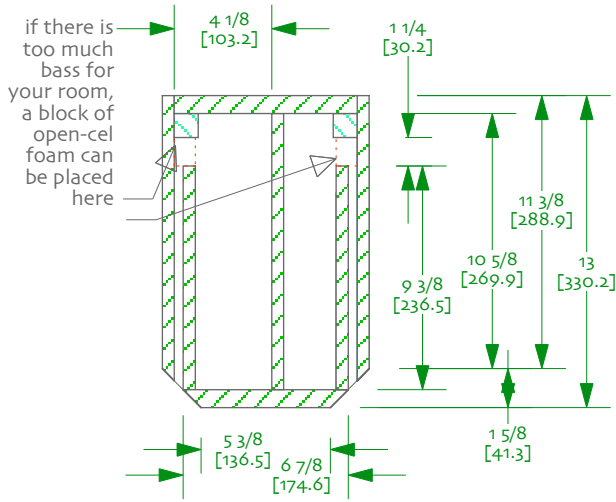

Notes:

- 0/ Basically 2 miniOnkens stacked with a sand-filled base
- 1/ All panels 1/2" thick baffle is 3/4" (or adjust for 2x 1/2")
- 2/ Ports are 2 1/4" long by 3/8" thick - 3 per side with a 1" solid spacer
- 3/ brace shape is only suggestive -- prime purpose is to brace speaker, it needs to be about 50% holes. (ie if you have to mount a terminal cup in the middle, you'll want to make sure the brace allows clearance)
- 4/ Don't forget to angle cut the back of the driver cut-out to give it breathing room
- 5/ All internal panels lined with ~1/2" (12mm) wool felt or 1" (25mm) fiberglass Note that it is hard to get into the box after it is sealed up
- 6/ If adapted to use WR125 the vertical position can be moved to better accommodate a tweeter.

