


FE127e Fonken-tuned floorstander


© 2006 planet_10 enterprises limited
 01-july -2006
 designed & drawn by dld
 free for non-commercial use only



Notes:

o/ drawn with 15mm material

1/ a Fonken has its walls lined with 1/2" cotton or wool felt. Due to the tall skinny nature of this impementation, some quarter-wave characteristics are taken on and some very loose polyfill or wool fill may be required to reduce some lower midrange ripple (0.1-0.23 lb / 45-106 g). The chart (modeled in MJK) is with no damping (red) and with 45 g of polyfluff (green), but no lining on the walls -- it shows the potential for ripple.

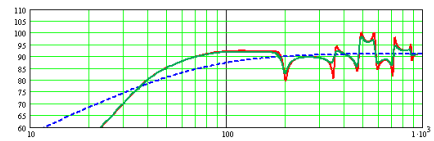

2/ the holey internal brace can be extended all the way down for increased panel stiffness.

3/ driver can be moved off the centre-line in which case mirror images pairs would be made.

